

INSTRUCTIONS


Ceiling light 3 rotating arms

1. Unpack without using any cutter or scissor because of possible scratches. Release the packaging of reflectors without removing it completely.



2. Locate the positioning of the round plate to the ceiling.

3. Screw the screws **into** the thread to remove the plate of the lamp.

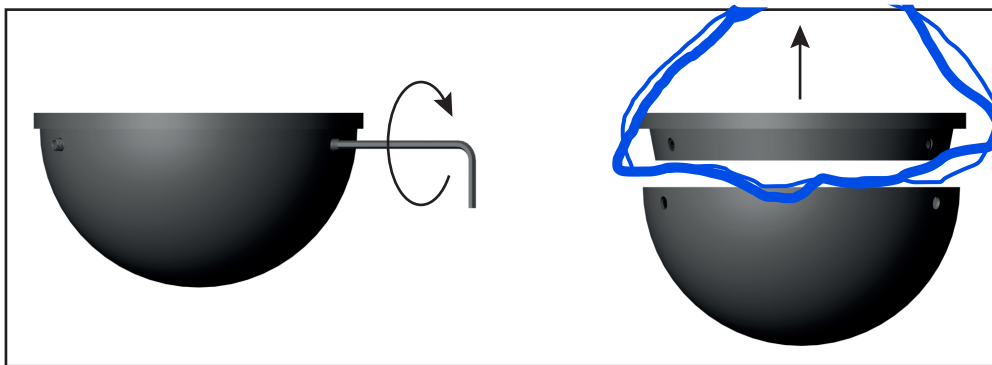

4. Fix the round plate to the ceiling

5. At this stage, at least 2 operators are necessary. One maintains the lamp, second operator connects electrical wires, then match the holes of the half-sphere in front of the screws (only one position is possible). Then unscrew 2mm of the screws.

6. Remove completely the packaging.

7. Screw the 3 hexagonal brass screws. Before moving the arms, the screw must not be tightened otherwise painting could be damaged.

